

sikkens
Wood Finishes

Cetol® SRD



Translucent Wood Finish

One-Coat

Protection for Wood

Siding Rails Decks

Simply Beautiful
WOOD FINISHES



Cetol® SRD

Cetol® SRD is Simply Beautiful

Sikkens developed Cetol SRD as a one-coat, translucent exterior wood finish created for use on a variety of exterior wood surfaces:

- Siding
- Railings
- Decks
- Siding Shakes & Shingles
- Fences
- Boat Docks
- Outdoor Furniture
- Logs




Cetol® SRD Performance Highlights

Feature	Benefits
One-coat application	Easy to use
High-quality translucent iron oxide pigments	Excellent UV protection & wood clarity
Good for decks and siding	Multi-use product for a variety of applications

Ten Natural Colors Available

Note: Printed colors shown here may vary from actual product colors.



996 Natural Light



078 Natural



005 Natural Oak




077 Cedar




085 Teak



072 Butternut



089 Redwood



045 Mahogany




113 Cape Cod Grey



009 Dark Oak



Cetol Color Sample cans available at participating Sikkens Dealers and at nam.sikkens.com. Use Cetol Color Sample  where reduced-emission products are required.

■ Preparation Procedures

New, Weathered (Uncoated Wood)

The best method to prepare wood surfaces is to sand with 80-120 grit sandpaper for vertical surfaces and 60-80 grit sandpaper for horizontal. **For optimal performance and appearance on new cedar decks, mechanically sand with 60-80 grit sandpaper.** Always sand in the direction of the wood grain. An alternative to sanding for preparation is listed below.

Cleaning Recommendation

1. Clean the surface with a solution of four ounces of 100% powdered Tri-Sodium Phosphate (TSP) or phosphate-free substitute plus one quart of liquid bleach in three quarts of water. Apply this solution generously to the wood with a garden pump sprayer.
2. Let the solution sit on the wood for 15-20 minutes. During this period, scrub the surface with a hard bristle brush to help remove mill glaze and/or weathering. Keep the wood wet. Do not let the solution dry on the wood.
3. Power wash the cleaning solution from the wood with clean water. To prevent damaging the wood, do not exceed 500 psi. The nozzle must be a maximum of one foot from the surface for full effectiveness.
4. Let the surface dry for 48 hours before applying the coating.
5. If there are any glossy patches, scuff sand with 80 grit sandpaper.
6. Cetol SRD should be applied within one week of preparation for horizontal surfaces (decks) and within four weeks on vertical surfaces (siding).

Tips

- **Refer to Sikkens Hardwoods Care Brochure for applications on hardwoods.**
- *New pressure-treated lumber requires a six-week drying period. Water-repellent treated lumber requires one year of weathering prior to application.*
- *New rough-sawn wood less than four weeks old should be dry-brushed using a brush with stiff bristles to remove loose dirt and fibers. If debris is still present, follow the preparation procedures.*
- *Weathered grey wood or wood affected with blue fungi or rust from nails may be treated after the surface preparation by applying a solution of four ounces of oxalic acid crystals in a gallon of warm water. This solution should be allowed to sit on the affected areas for 15-20 minutes before the final rinse with clean water. Let dry 48 hours before coating.*
- *It is always recommended to perform a one-coat color test on a sample of the wood.*
- **Previous coatings must be removed prior to the application of Cetol SRD.**

■ Application Procedures

Coverage area for Cetol SRD is 200-300 sq. ft./U.S. gal. (smooth wood) and 100-150 sq. ft./U.S. gal. (rough-weathered wood)

1. Follow the Preparation Procedures.
2. Apply only one coat of Cetol SRD by brush, roller or spray. If spray or roller applied, Cetol SRD must be back brushed immediately to ensure penetration and to avoid an uneven finish. When using SRD ^{RS}, brushing is the preferred method for application on decks and other horizontal surfaces.
3. Clean tools with mineral spirits.

Application Do's ...

- Apply when the surface and air temperature is 10°C/50°F to 35°C/95°F
- Stir before using
- Saturate all end grains
- Maintain a wet edge
- Apply in direction of the grain
- Back prime (if possible)
- Intermix batches to ensure color consistency

Application Don'ts ...

- Do not apply in direct sunlight
- Do not apply when the surface is hot to the touch
- Do not apply when rain, dew or frost is present or expected within five hours
- Do not apply when moisture content of the wood is greater than 21%
- Do not use Cetol SRD as a primer with other Sikkens products
- Do not thin

■ Maintenance Procedures

To help maintain its protective characteristics, apply a maintenance coat of Cetol SRD when visually required.

1. Follow the cleaning recommendation.
2. Apply one coat of Cetol SRD by brush, roller or sprayer.

Tips


- Areas that have minimum wear should only be lightly coated. Hardwood surfaces may require more frequent maintenance.
- Color #996 Natural Light and #113 Cape Cod Grey may require more frequent maintenance (i.e., every 18-24 months for siding), and are not recommended for darker colored wood.



Cetol® SRD

Exterior wood surfaces are exposed to a variety of harsh elements. Ultraviolet rays, rain, sleet and snow all contribute to damaging those surfaces. The wood finish experts at Sikkens understand these challenges. The choice is simple.

Cetol SRD offers a high-quality, affordable, one-coat, easy-to-use product to protect and beautify your home.

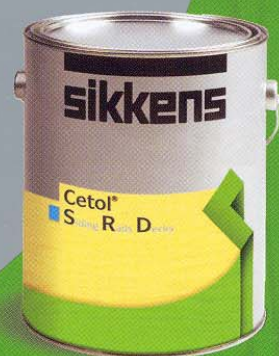

Simply Beautiful[®]

sikkens

Wood Finishes

Akzo Nobel Decorative Paints USA

Sikkens Wood Finishes

117 Brush Street

Pontiac, MI 48341-2215

1-866-SIKKENS

www.nam.sikkens.com

email: sikkensnam@akzonobel.com



■ Products to Know

Cetol® is the brand name of Sikkens products that fall into either the Translucent or Clear categories. When you see a product with Cetol® on the label, this product will allow you to see all the wood grain and character of the wood (although depending on the product it may color the wood).

Support your local dealer:
